


### **SYSTEM COMPONENTS**


#### CUPACLAD® 101 Logic

- CUPACLAD\*
  Natural slate
- (2) 101 self-tapping screw
- 3 101 horizontal batten
- 4 Vertical "L"
- Self-tapping screw (substructure)
- Metal bracket (fixed point)
- Metal bracket (sliding point)

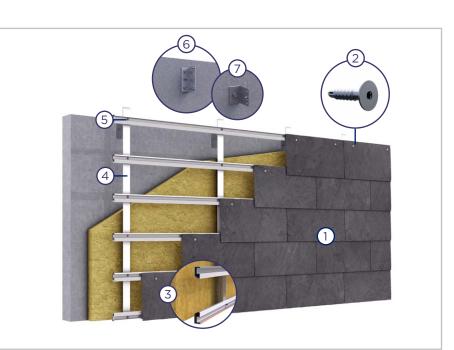

#### CUPACLAD® 201 Vanguard

- 1 CUPACLAD\* Natural slate
- 201 V Clip
- 3 201 V horizontal batten
- (4) Vertical "L"
- (5) 201-V top profile
- 6 Self-tapping screw (substructure)
- Metal bracket (fixed point)
- Metal bracket (sliding point)

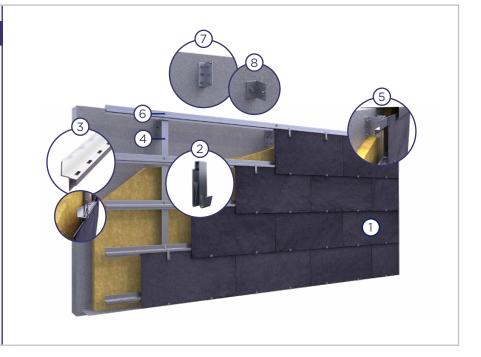




### HCUPACLAD

#### Natural slate cladding systems

CUPACLAD\* combines the latest installation solutions with our highly durable natural slate. Ventilated cladding systems are innovative, efficient, and sustainable rainscreen solutions.

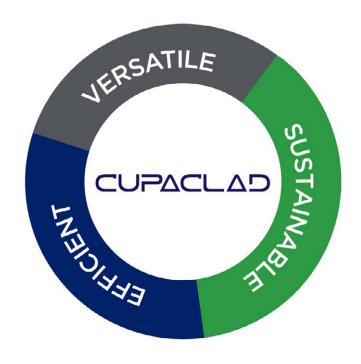







Accommodates continuous exterior insulation.

Highly durable.

Maintenance free.

Quick and easy to install.

Fits Historic to Contemporary design.


Lighweight and versatile.

Multiple installation options.





## 101 Logic SIMPLE AND BALANCED

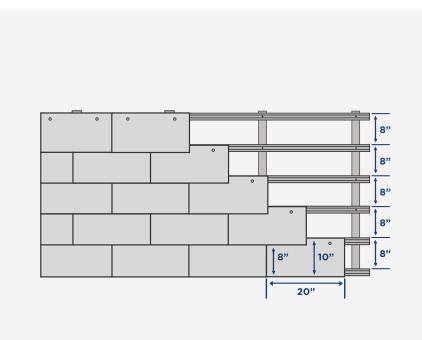

	Traditional masonry pattern	
	ACTUAL	NOMINAL
Dimensions (w x h)	50 X 25 cm	20" X 10"
Exposure (w X h)	50 X 20 cm	20" X 8"
Thickness	7,65 mm	1/4"-to-3/8"
Slate required to cover 1 ft <sup>2</sup>		0,93
Square feet covered by 1 slate		1.08
Weight/ft <sup>2</sup> (slate only)		5,48 lbs/ft <sup>2</sup>
Weight/ft² (full rainscreen)		6.80 lbs/ft <sup>2</sup>
	Traditional n	
	ACTUAL	NOMINAL
Dimensions (w x h)	40 X 20 cm	16" X 8"
Exposure (w X h)	40 X 15 cm	16" X 6"
Thickness	7,65 mm	1/4"-to-3/8"
Slate required to cover 1ft <sup>2</sup>		1,55

0.64

5.86

7.43

Square feet covered by 1 slate

Weight/ft<sup>2</sup> (full rainscreen)


Weight/ft2 (slate only)







### 101 Random DYNAMIC AND CREATIVE

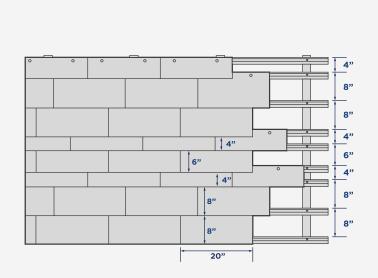


An organic pattern is created from 3 slate sizes			
	ACTUAL	NOMINAL	
Dimensions (w x h)	50 X 25 cm	20" X 10"	
	50 X 20 cm	20" X 8"	
	50 X 15 cm	20" X 6"	
Exposure (w X h)	50 X 20 cm	20" X 8"	
	50 X 15 cm	20" X 6"	
	50 X 10 cm	20" X 4"	
Thickness	7.65 mm	1/4"-to-3/8"	
Slate required to cover 1ft <sup>2</sup>		1.24	
Square feet covered by 1 slate		0.81	
Weight/ft² (slate only)		6.58 lbs/ft <sup>2</sup>	
Weight/ft² (full rainscreen)		8.21 lbs/ft <sup>2</sup>	







## 101 Parallel UNIFORM AND REGULAR

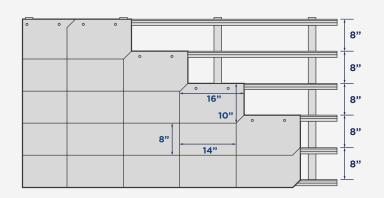


Inis double-lapped installation adds extra texture				
	ACTUAL	NOMINAL		
Dimensions (w x h)	40 X 25 cm	16" X 10"		
Exposure (w X h)	35 X 20 cm	14" X 8"		
Thickness	7.65 mm	1/4"-to-3/8"		
Slate required to cover 1ft <sup>2</sup>		1.33		
Square feet covered by 1 slate		0.75		
Weight/ft <sup>2</sup> (slate only)		6.15 lbs/ft <sup>2</sup>		
Weight/ft <sup>2</sup> (full rainscreen)		7.47 lbs/ft <sup>2</sup>		







# 201 Vanguard MODERN AND EFFICIENT

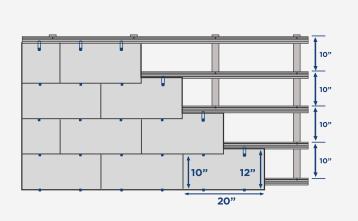

Exposed stainless steel clip system		
	ACTUAL	NOMINAL
Dimensions (w x h)	60 X 30 cm	24" X 12"
Exposure (w X h)	60 X 26 cm	24" X 10"
Thickness	7.65 mm	1/4"-to-3/8"
Slate required to cover 1ft <sup>2</sup>		0.59
Square feet covered by 1 slate		1.68
Weight/ft <sup>2</sup> (slate only)		4.95 lbs/ft <sup>2</sup>
Weight/ft² (full rainscreen)		6.05 lbs/ft <sup>2</sup>





